


PRODUCT CODE
 LN-SRDC-48U6012-SV-CC-DGAA
 LN-SRDC-48U6012-SV-CC-DG00



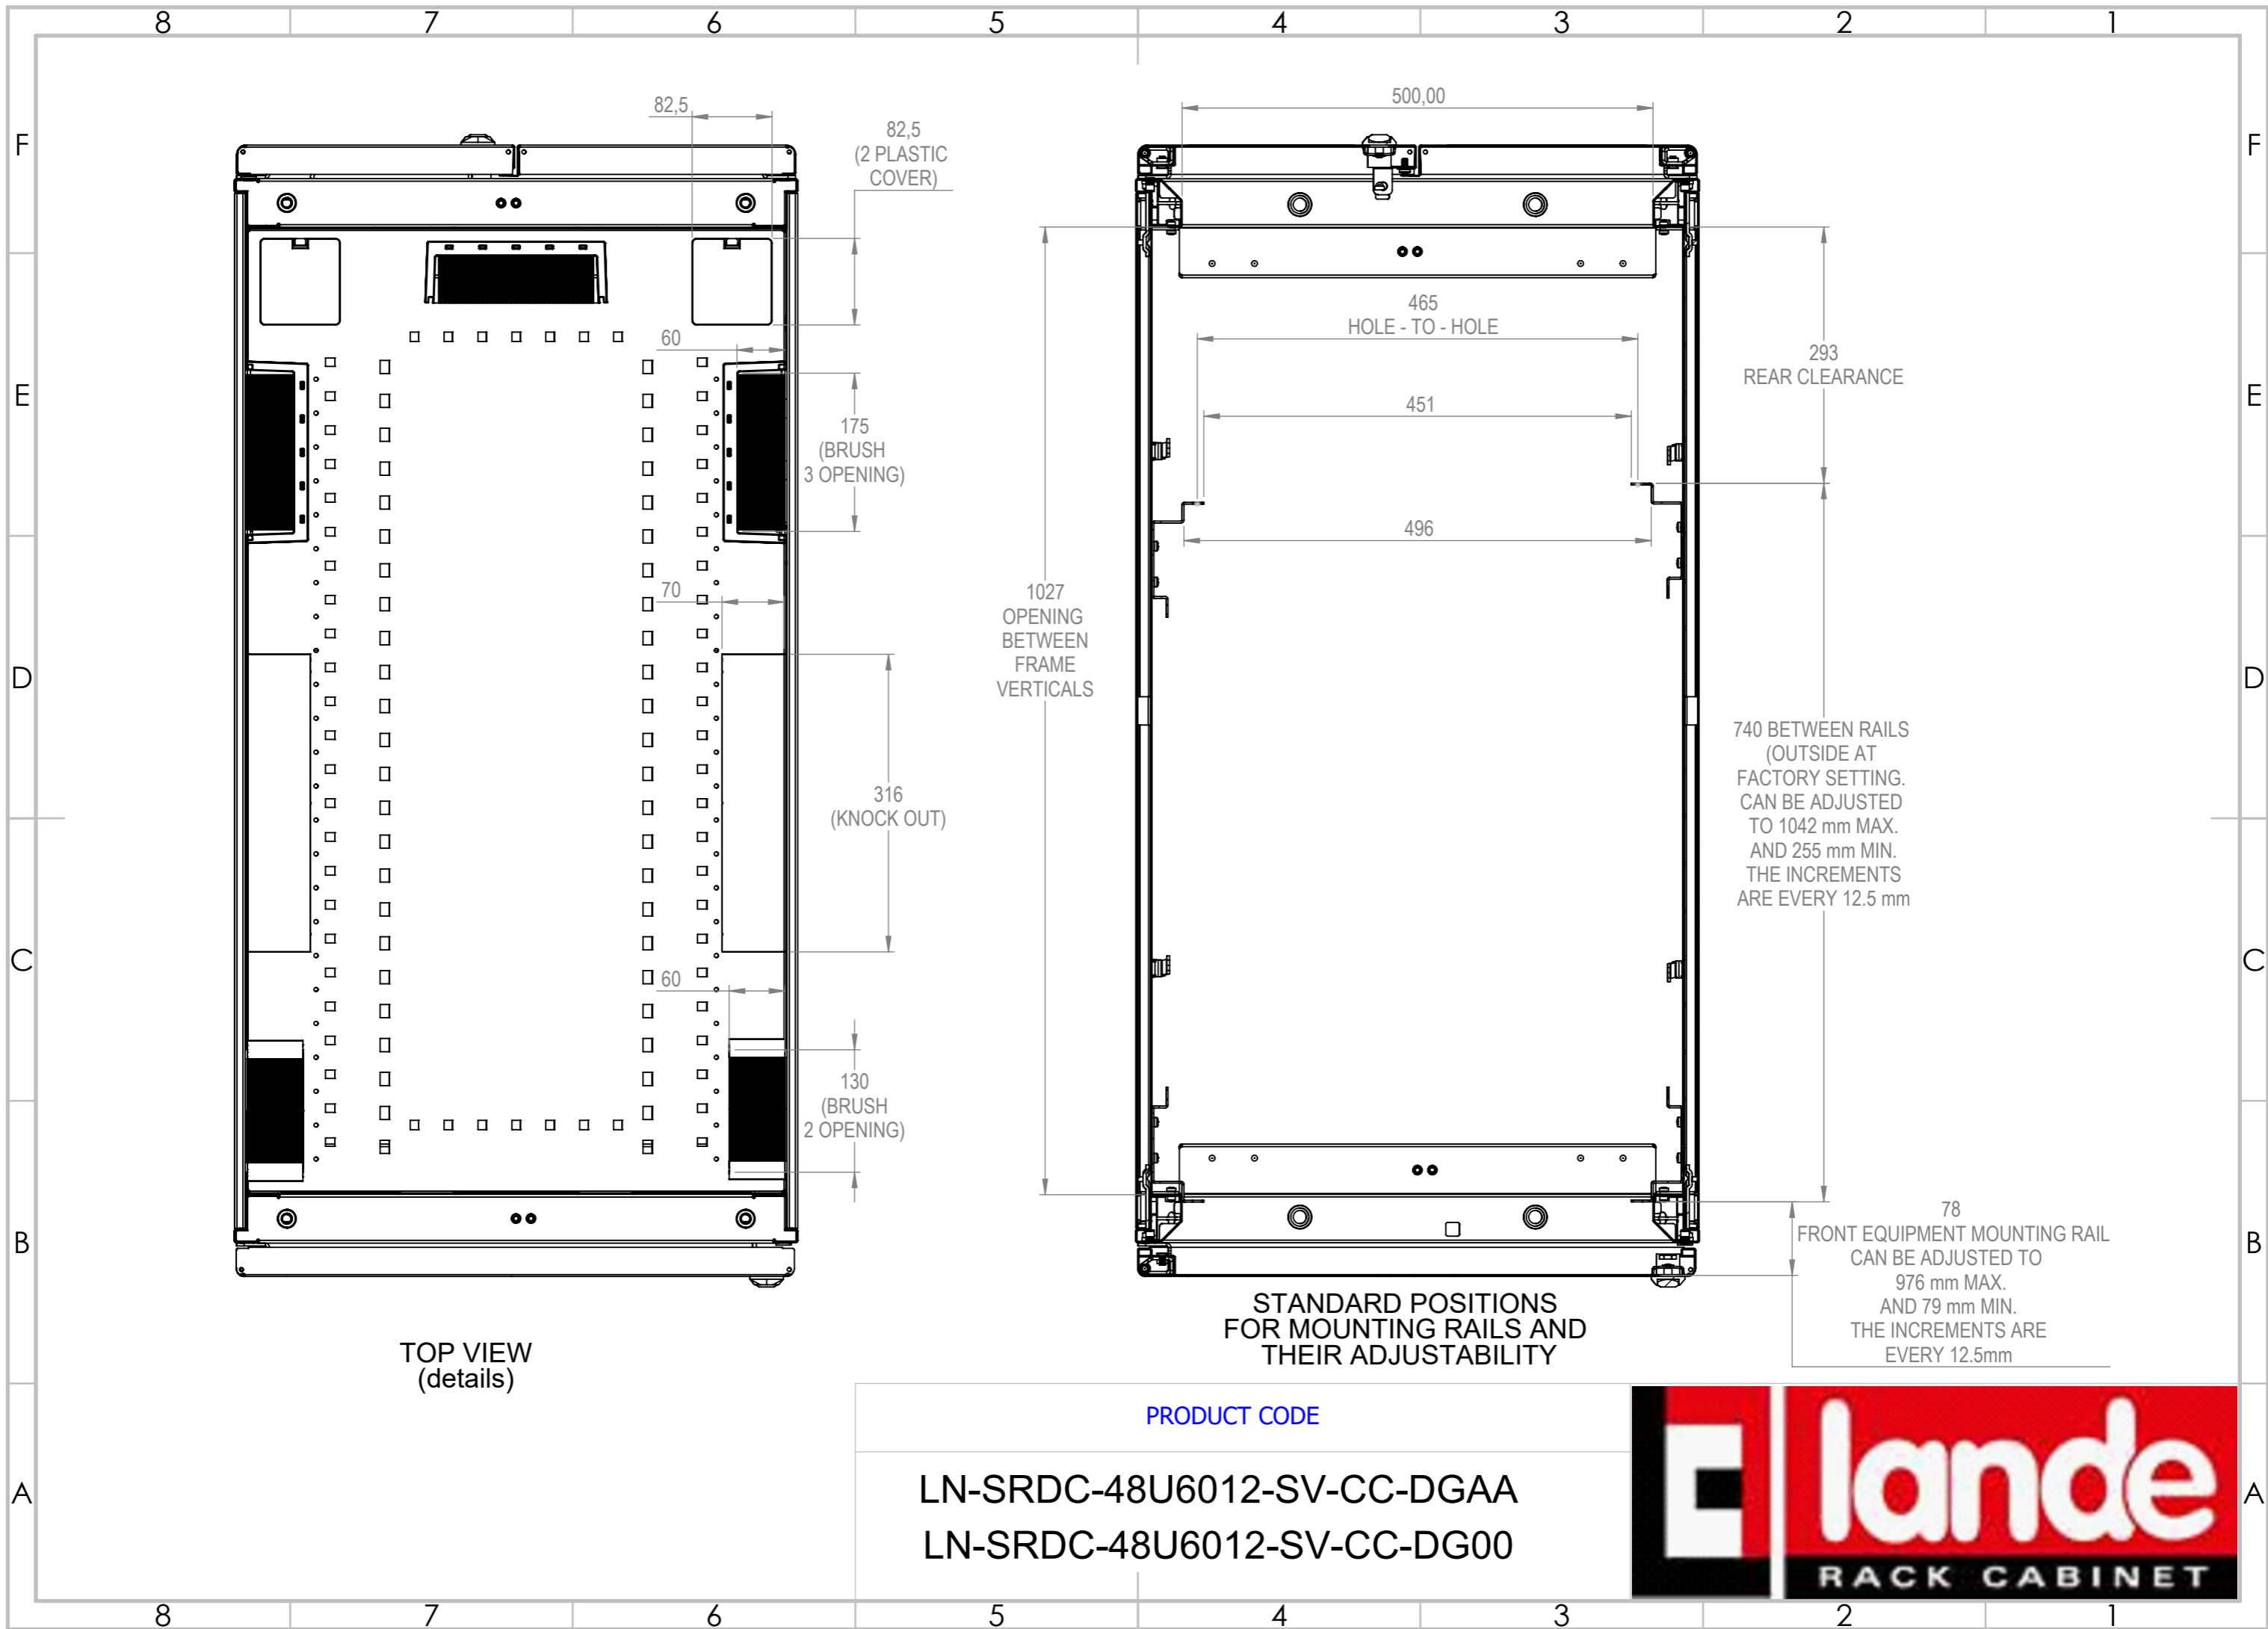


TOP VIEW
(details)

STANDARD POSITIONS
FOR MOUNTING RAILS AND
THEIR ADJUSTABILITY

PRODUCT CODE

LN-SRDC-48U6012-SV-CC-DGAA
LN-SRDC-48U6012-SV-CC-DG00



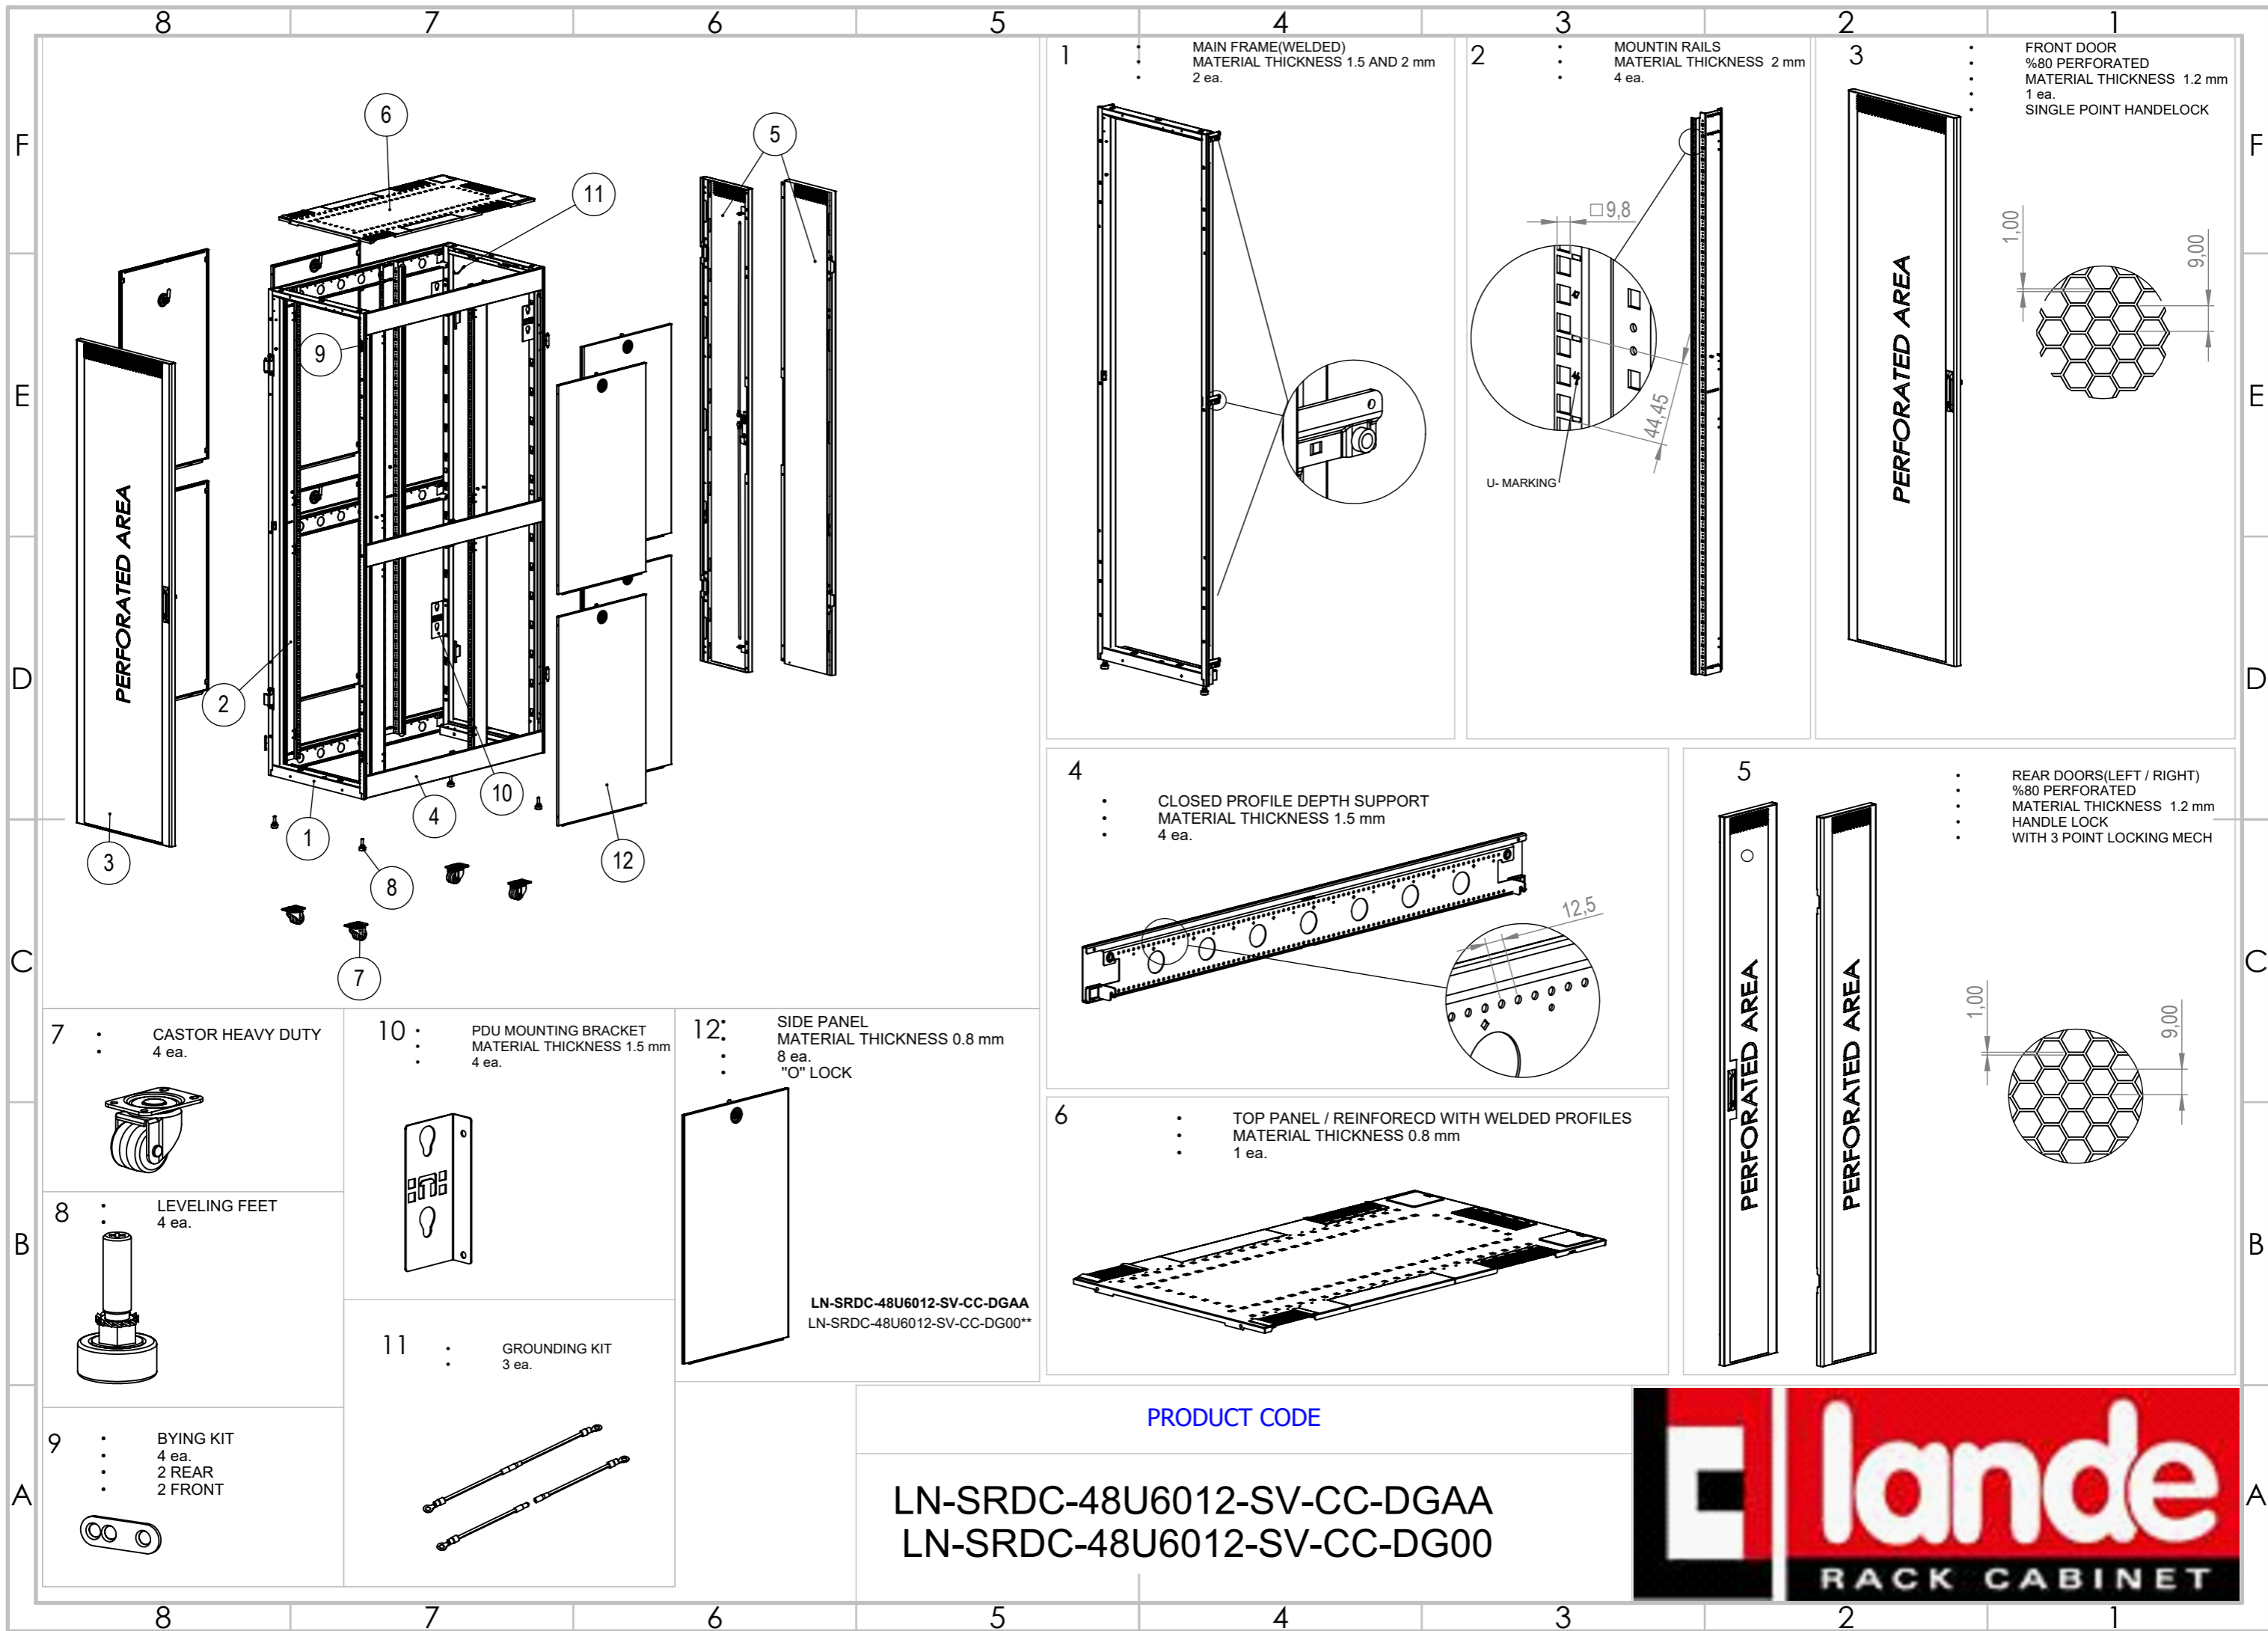

1 MAIN FRAME(WELDED)
MATERIAL THICKNESS 1.5 AND 2 mm
2 ea.

2 MOUNTIN RAILS
MATERIAL THICKNESS 2 mm
4 ea.

3 FRONT DOOR
%80 PERFORATED
MATERIAL THICKNESS 1.2 mm
1 ea.
SINGLE POINT HANDELOCK

4 CLOSED PROFILE DEPTH SUPPORT
MATERIAL THICKNESS 1.5 mm
4 ea.

5 REAR DOORS(LEFT / RIGHT)
%80 PERFORATED
MATERIAL THICKNESS 1.2 mm
HANDLE LOCK
WITH 3 POINT LOCKING MECH

7 CASTOR HEAVY DUTY
4 ea.

10 PDU MOUNTING BRACKET
MATERIAL THICKNESS 1.5 mm
4 ea.

12 SIDE PANEL
MATERIAL THICKNESS 0.8 mm
8 ea.
"O" LOCK

8 LEVELING FEET
4 ea.

11 GROUNDING KIT
3 ea.

9 BYING KIT
4 ea.
2 REAR
2 FRONT

LN-SRDC-48U6012-SV-CC-DGAA
LN-SRDC-48U6012-SV-CC-DG00**

6 TOP PANEL / REINFORECD WITH WELDED PROFILES
MATERIAL THICKNESS 0.8 mm
1 ea.

PRODUCT CODE

LN-SRDC-48U6012-SV-CC-DGAA
LN-SRDC-48U6012-SV-CC-DG00

